

The Specialist in
Drain Cleaning Equipment
for over 75 Years



Drain Cleaning Machine G100

Extra Portability and Performance.



**For Pipes
30 - 100 mm Dia.**

The CABERE® G100 gives you extra portability because 8" semi-pneumatic wheels let you keep the weight on the ground. Its rubber feet hold it solidly in position on the job.

An easy-grip handle folds down to save space and locks into place to act as a lifting handle.

The strong 1/3 hp motor with capacitor start and overload protection makes sure that even tough stoppages have no chance.

A variable speed Power Cable Feed enables you to easily feed or retrieve the rotating cable at up to 16 feet per minute - without the need to reverse the rotary direction of the motor. It can quickly adjust to take 10 and 13 mm cables without requiring tools or additional parts.

The G100 is the ultimate small drain machine - and a great value, enabling you to clear clogged drain lines from 30 to 100 mm in diameter with just one machine. The drum comfortably holds 23 m of 10 mm or 13 mm Flexikern® Cable and features a free floating inner drum with an integral distributor tube to help prevent cable tangling.

You can remove the drum in seconds to switch to a different diameter cable without the need for tools and with no mess.

By switching to the optional Mini-Drum you can handle smaller drain lines with the more flexible 7 mm or 8 mm Dia. Flexikern® Cables.

For your safety, the G100 has a pneumatic foot pedal with no wiring between pedal and motor. The motor switch has an „off“ position, so the machine won't start if the pedal is pressed accidentally.

Convenient cord wraps on the frame secure the power cord and foot pedal with air hose during transport.



G100 Power Cable Feed

A variable speed power cable feed attachment makes feeding and retrieving the cable much easier. It quickly adjusts between 10 and 13 mm Dia. cables without the need for tools or additional parts. The Spring Guide Tube safely guides the cable into drain opening and reduces cable whipping and drag.

CABERE® G100

Specifications

Weight:

30,7 kg without cable

Dimensions:

64cm deep x 45cm wide x 99cm high, 61,5cm high with handle folded down.

Drum:

Heavy gauge steel, treated for rust resistance. (Code 51010) Equipped with inner drum and distributor tube to prevent cable tangling under load. Quickly removable from frame. Capacity: 23m x 13 or 10mm Dia. Flexikern® Cable.

Mini-Drum (optional):

Heavy gauge steel, treated for rust resistance. Collet chuck with tightening handle. Capacity: 15 m x 8 or 7 mm Dia. Flexikern® Cable. Code 50905

Motor:

1/3 hp electric motor, 230 V, CE with capacitor start, overload protection and forward-off-reverse switch. Spring-loaded mounting for proper belt tension.

Load Speed:

165 rpm.

Pneumatic Foot Switch:

Uses air pressure, so there's no electrical contact between pedal and motor. Leaves operator's hands free to control cable.

Wheels:

200mm Dia. semi-pneumatic tires with oilite bronze bushings.

Power Cable Feed:

Drives 10 and 13 mm Dia. cables forward and reverse at variable speed by moving control handle up and down - without having to reverse motor rotation.

Leather Gloves:

With reinforced palm for hand protection and proper slippage when guiding cable.

Cutter Set (Basic equipment):

Arrow Head 25mm, Boring Gimlet 30mm, U-Cutter 40mm, Side Cutter Blades 50mm (Other cutters available, see page CUTTERS).

Safety Slip Clutch (optional):

Protects cable and operator.

Code 50040


Flexikern® Replacement Cables:

For Pipes mm Dia.:	Diameter x Length	Code
75-100	13mm x 15m*	55137
	13mm x 23m*	55138
50- 75	10mm x 15m*	55107
	10mm x 23m*	55108
40- 50	8mm x 15m*	55087
30- 50	7mm x 15m**	55073

* with connectors, **with Basin Plug Head

Folding Handle

The handle is tall enough to make it easy to move to the job, yet it quickly can be folded to take less room in your truck.

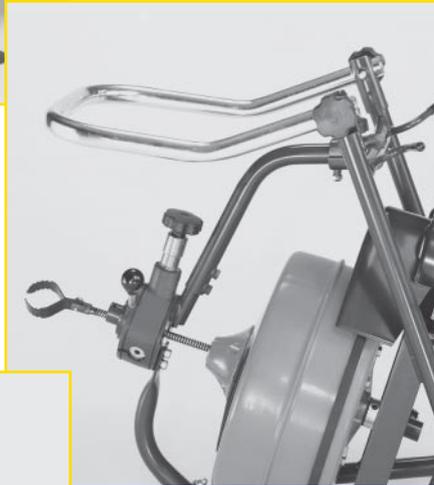

Removable Drum

You can take the drum off in seconds. Just loosen one knob and the power feed swings out of the way. Then push down on the spring loaded motor to slip off the V-belt. Release the latch and slide off the drum.



Flexikern® Wire Rope Center Cables:

Patented construction with 42-strand wire rope!!!

1 Year Warranty

against defect or breakage!



G100 4-Piece Cutter Set Code 55401 (Basic equipment)




Arrow Head 25 mm
Code 55411



U-Cutter 40mm
Code 55418



Boring Gimlet 30mm, Code 55404

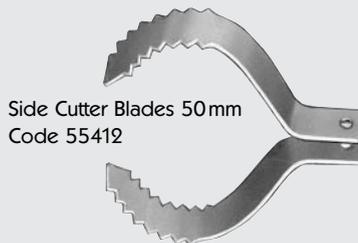

Side Cutter Blades 50mm
Code 55412

G100 Set 1

for pipes
to 75 mm Dia.

G100 Set 2

for pipes
to 75 mm Dia.

G100 Set 3

for pipes
to 100mm Dia.

G100 Set 4

for pipes
to 100 mm Dia.

with Flexikern® Cable
10mm Dia. x 15 m

with Flexikern® Cable
10mm Dia. x 23 m

with Flexikern® Cable
13 mm Dia. x 15 m

with Flexikern® Cable
13 mm Dia. x 23 m

Code 51001

Code 51002

Code 51003

Code 51004